

STP060S-12/Sb


STP065S-12/Sb

Suntech's STPSb features total efficiency of 12.7% Which delivers the maximum power output at peak hours. Ideal for off-grid and remote power systems. With a 25 year warranty, the module has high efficiency and long-lasting operating time even in a variety of rigorous conditions. Unique textured cell surface and bypass diode design is critical for the module to fully utilize and absorb sunlight and offer maximum usable power per square foot of solar array.

Features and benefits

- High efficiency
- Nominal 12 V DC for standard output
- Outstanding low-light performance
- High transparent low-iron, tempered glass
- Unique techniques give the panel following features: esthetic appearance, with stands high wind-pressure and snow load, and easy installation
- Unique technology ensure that problems of water freezing and warping do not occur
- Design to meet unique demand of customer
- 25 year power output warranty

High Efficiency, High Quality PV Module

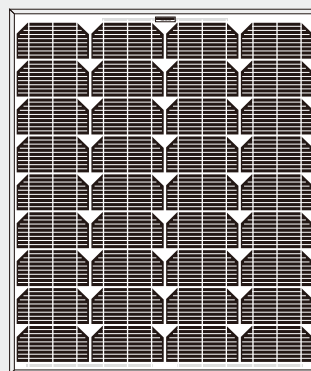


Electrical Characteristics

Model	STP065S-12/Sb	STP060S-12/Sb
Open-circuit voltage (Voc)	22.1V	22V
Optimum operating voltage (Vmp)	17.8V	17.6V
Short-circuit current (Isc)	4.05A	3.84A
Optimum operating current (Imp)	3.65A	3.41A
Maximum power at STC (Pmax)	65Wp	60Wp
Operating temperature	-40°C to +85°C	-40°C to +85°C
Maximum system voltage	715V DC	715V DC

STC: Irradiance 1000W/m², Module temperature 25°C, AM=1.5

Module Diagram

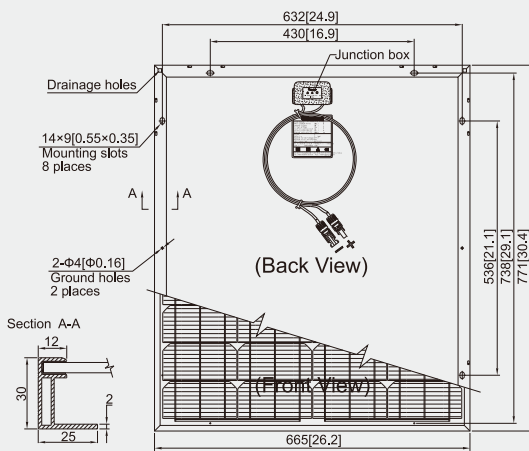

Note: mm[inch]

Specifications

Cell	Monocrystalline silicon solar cells 156mm×78mm
No. of cells and connections	36(4×9)
Dimension of module	771mm×665mm×30mm
Weight	6.2kg

Temperature Coefficients

NOCT	45°C±2°C
Short-circuit current temperature coefficient	(0.055±0.01) %/K
Open-circuit voltage temperature coefficient	-(78±10) mV/K
Peak power temperature coefficient	-(0.48±0.05) %/K
Power tolerance	±5%

NOCT: Nominal Operating Cell Temperature
(the data is only for reference)

Output

Cable	LAPP(4.0mm ²)
Lengths	750mm(-) and 750mm(+)
Connection	MC Plug Type IV

Characteristics

Module IV Graph 60W

